



1/20


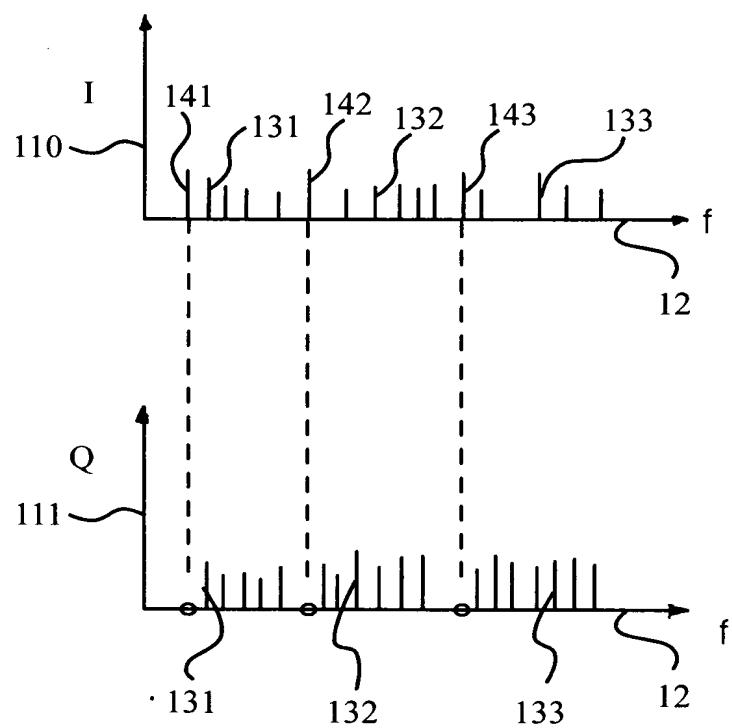


Fig. 1

2/20

TX Phase

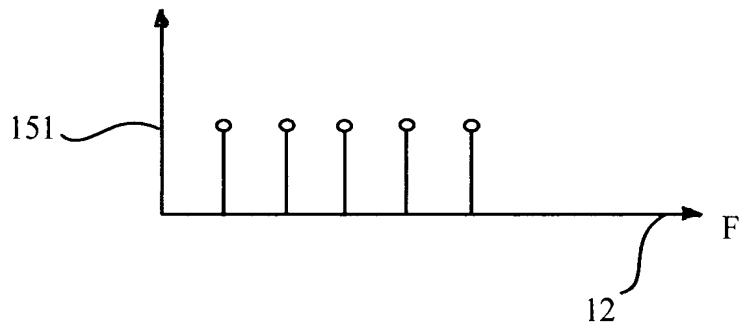

RC Phase

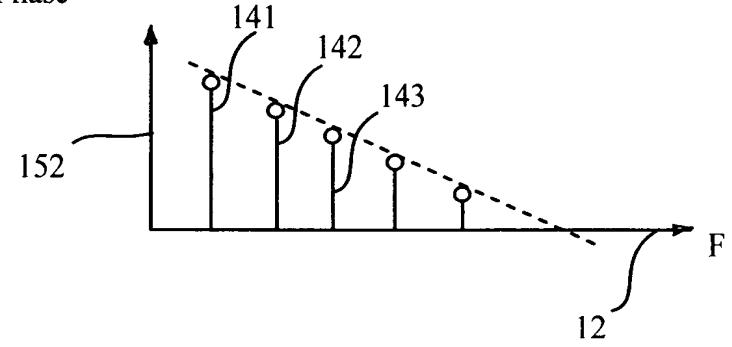


Fig. 2

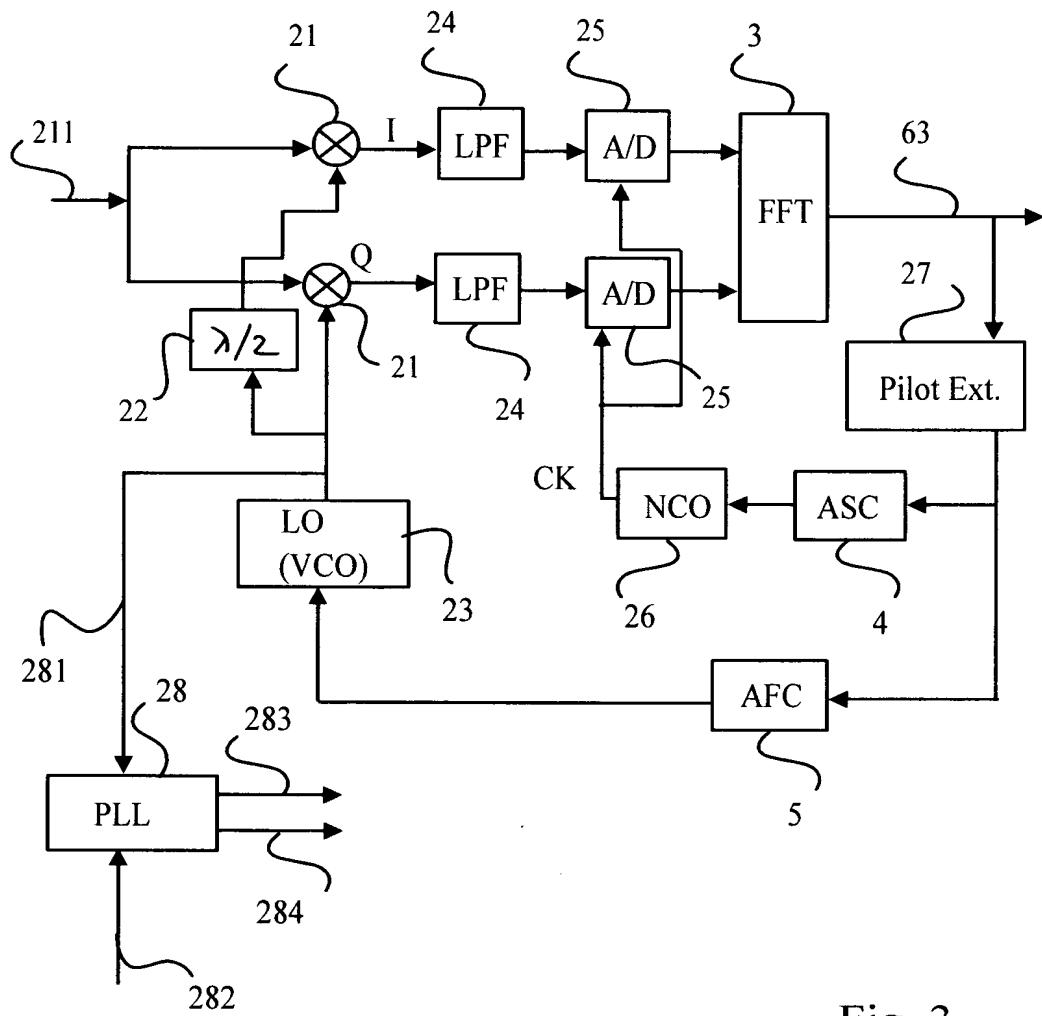


Fig. 3

4/20

Phase

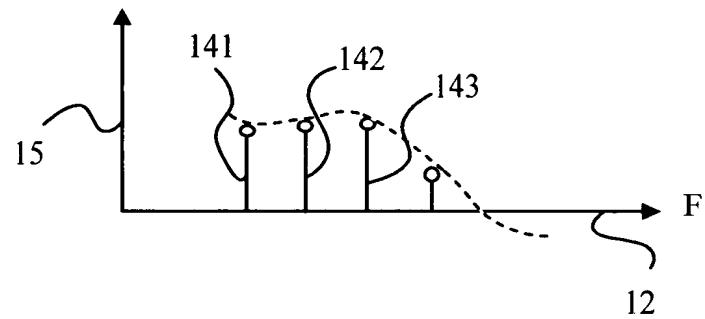


Fig. 4A

AMP

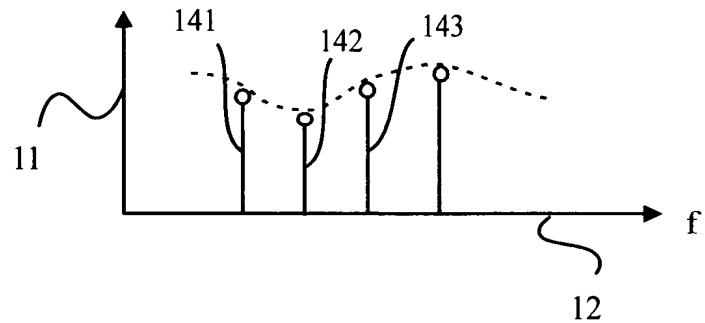


Fig. 4B

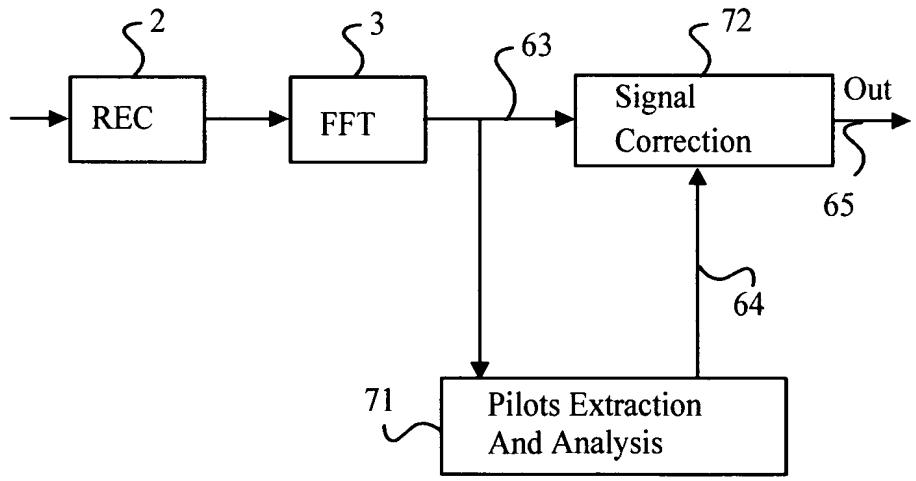


Fig. 5

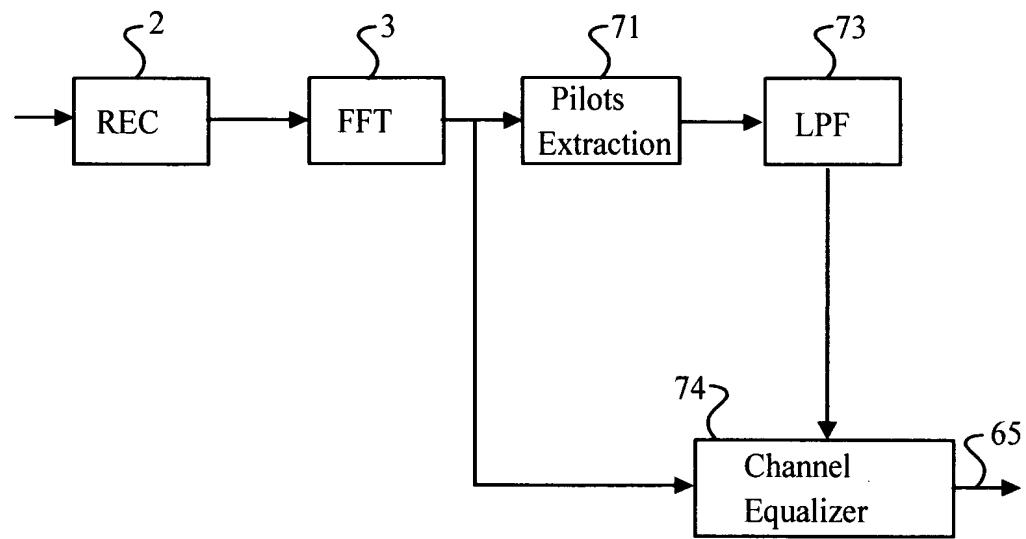


Fig. 6

7/20

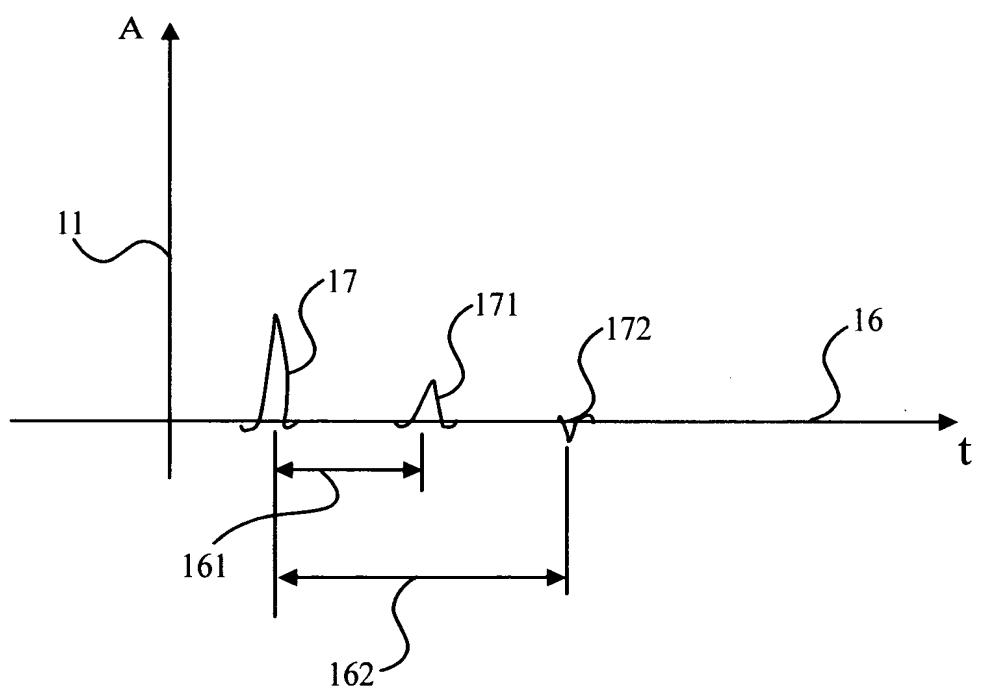


Fig. 7

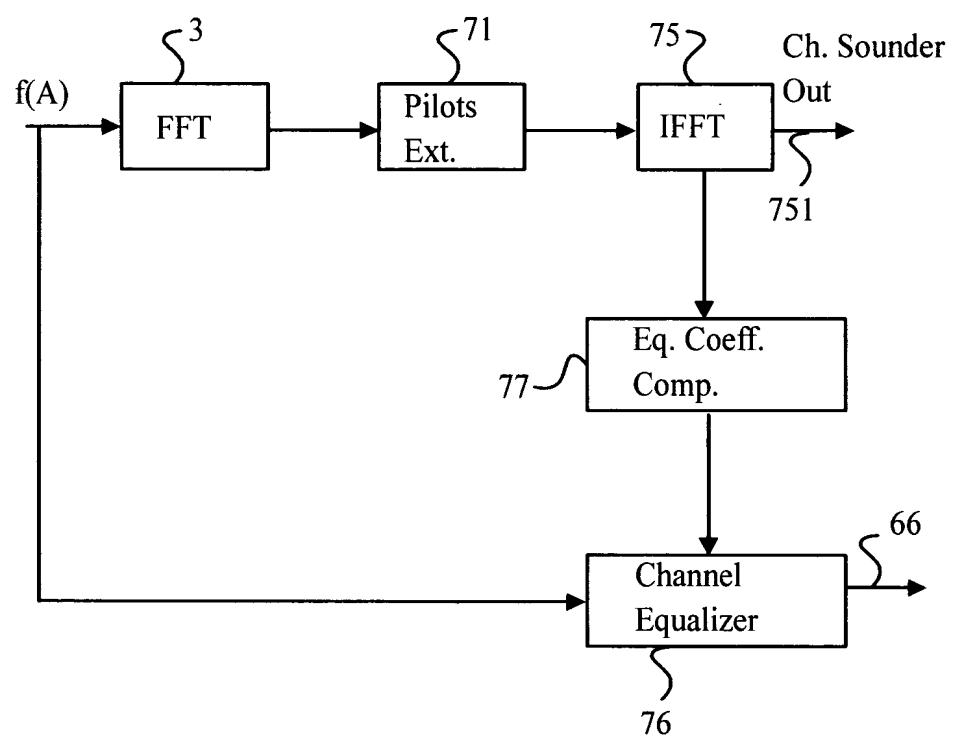


Fig. 8

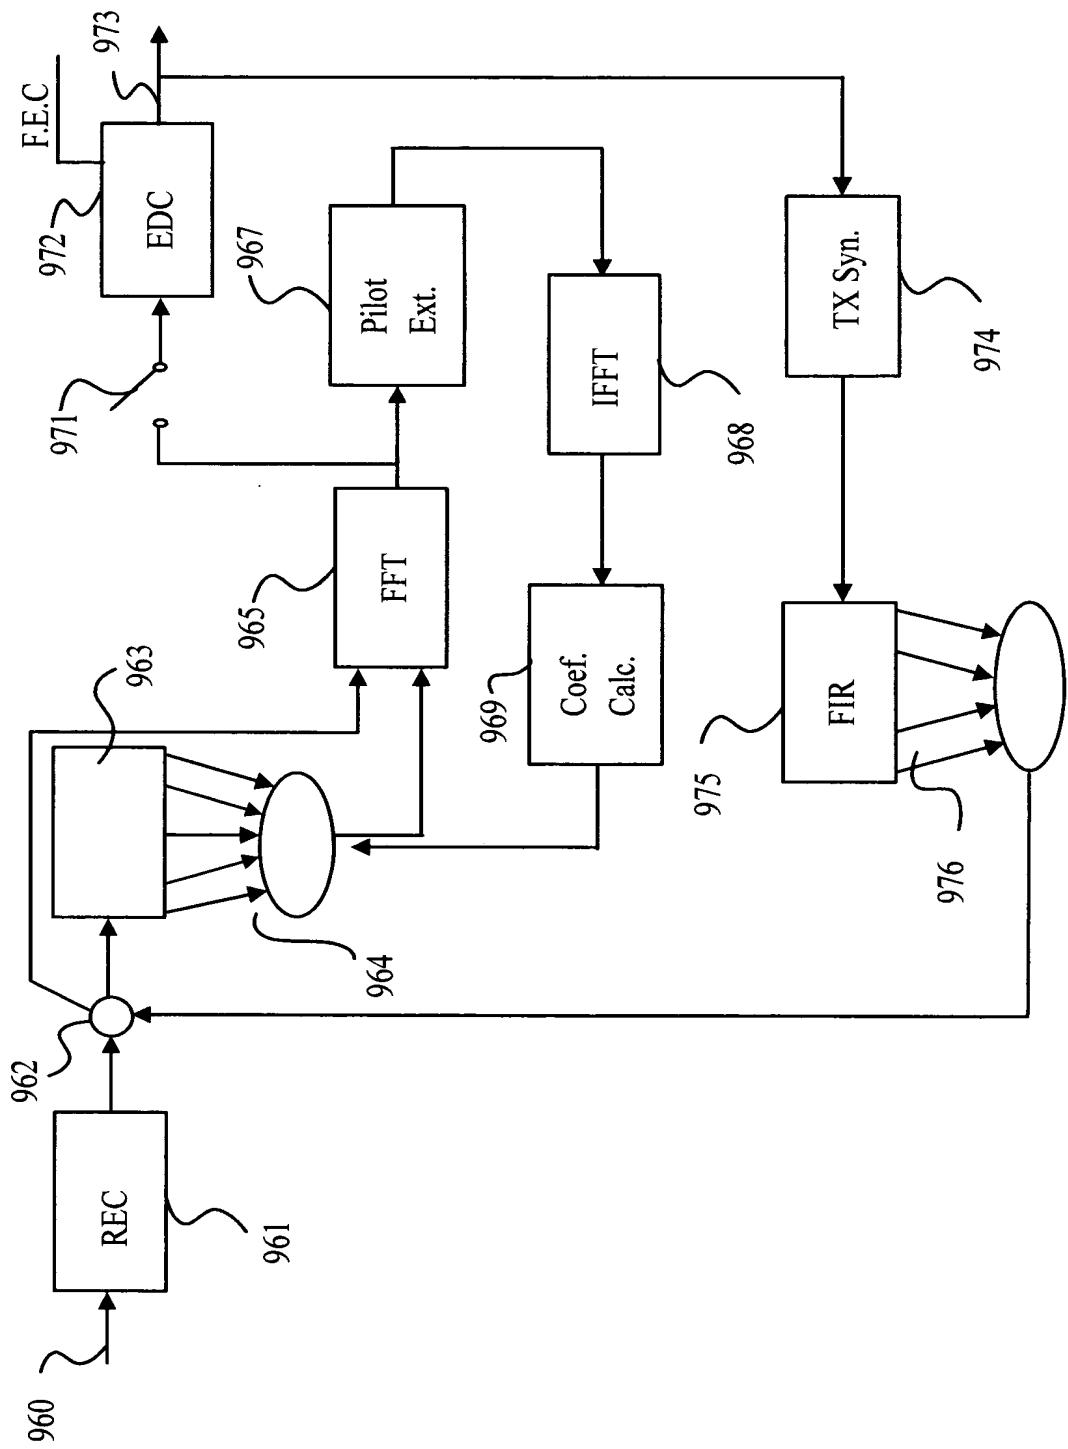


Fig. 9

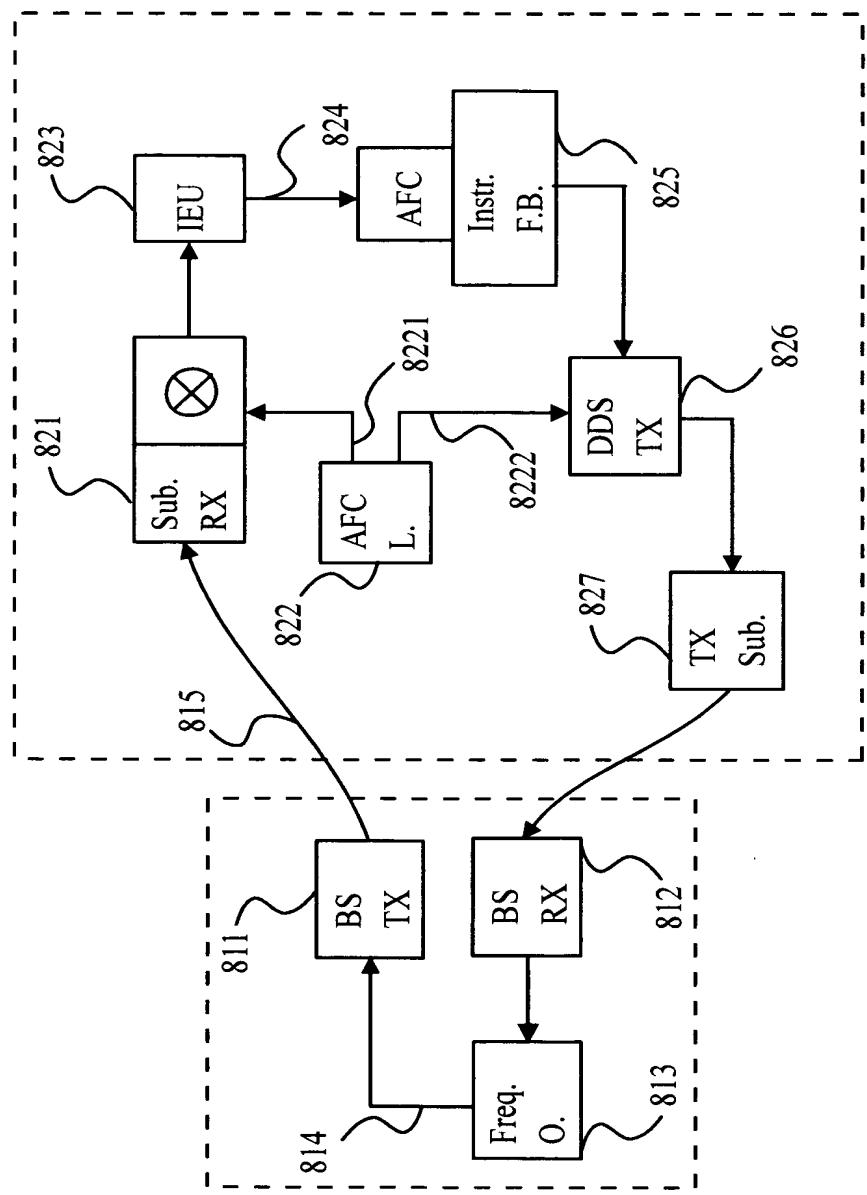


Fig. 10

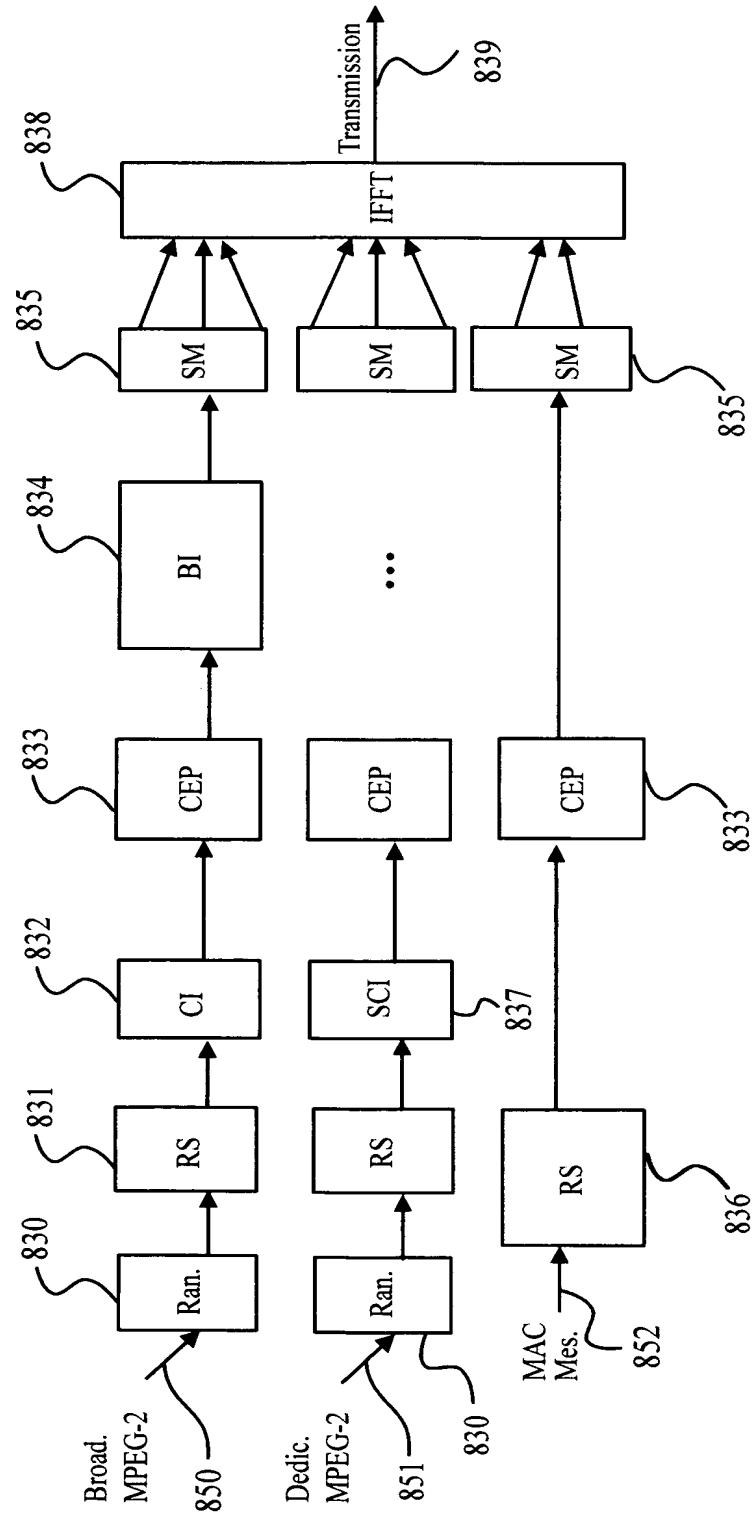


Fig. 11

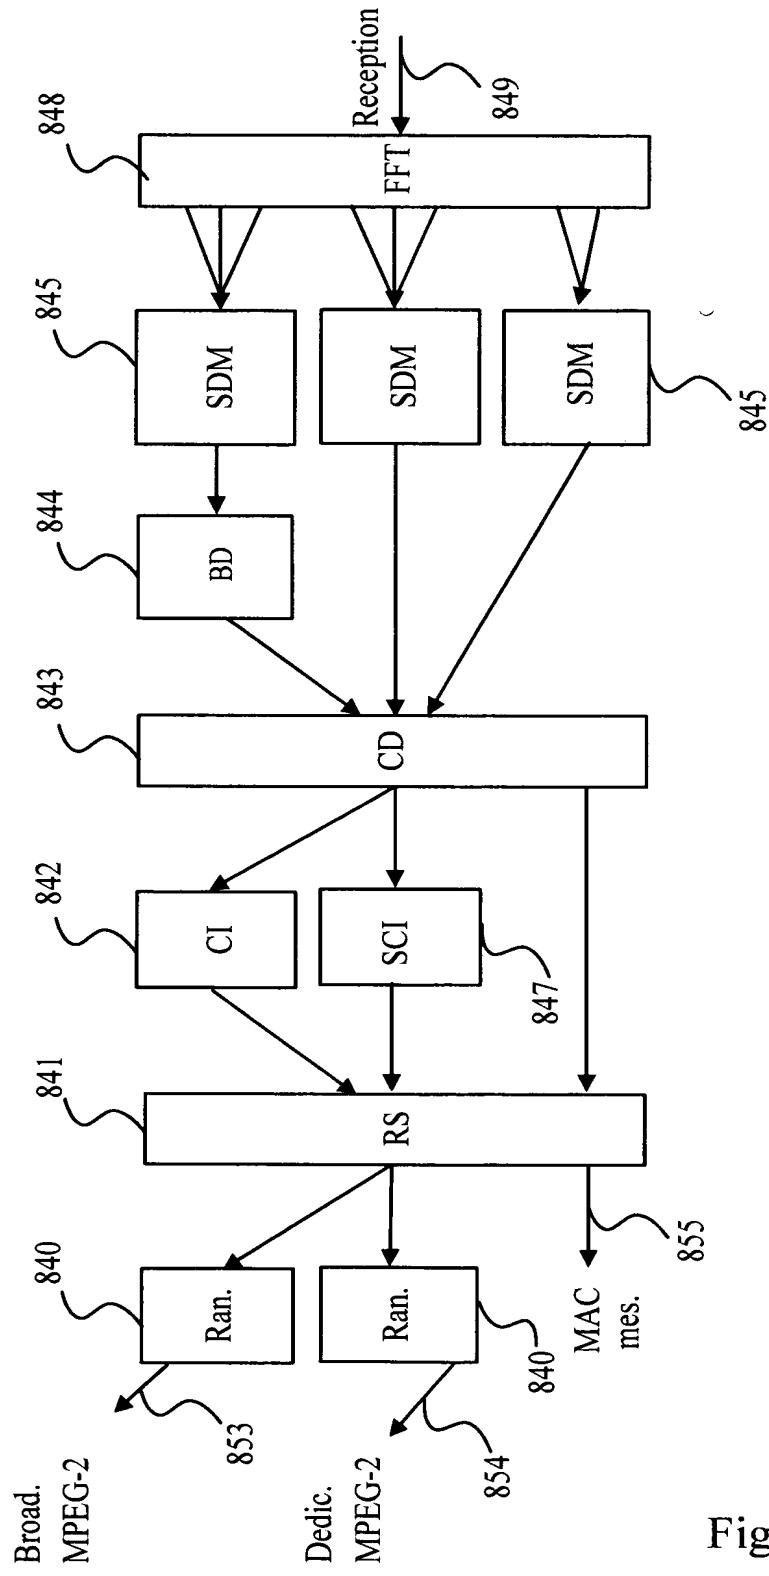


Fig. 12

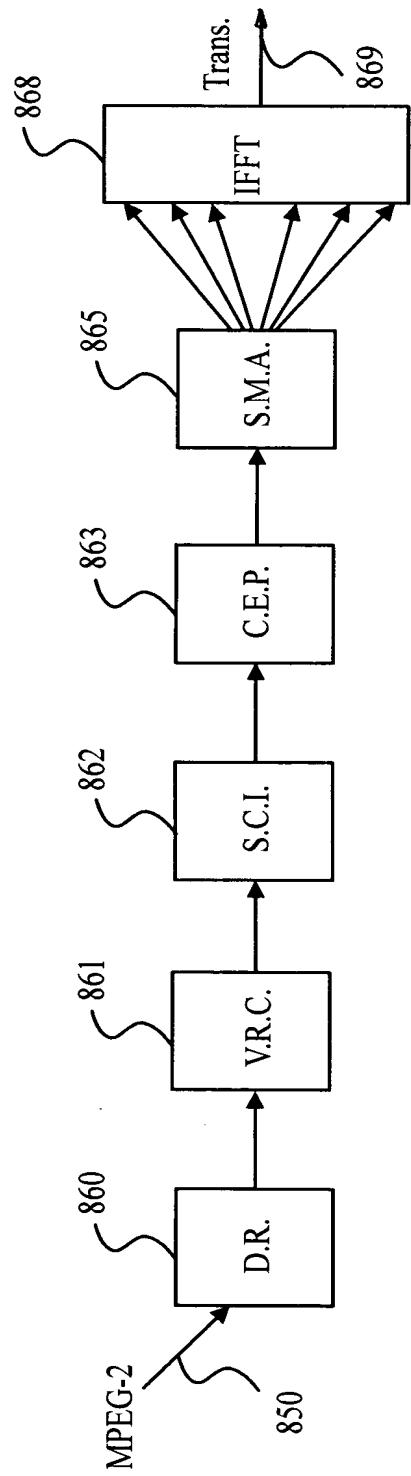


Fig. 13

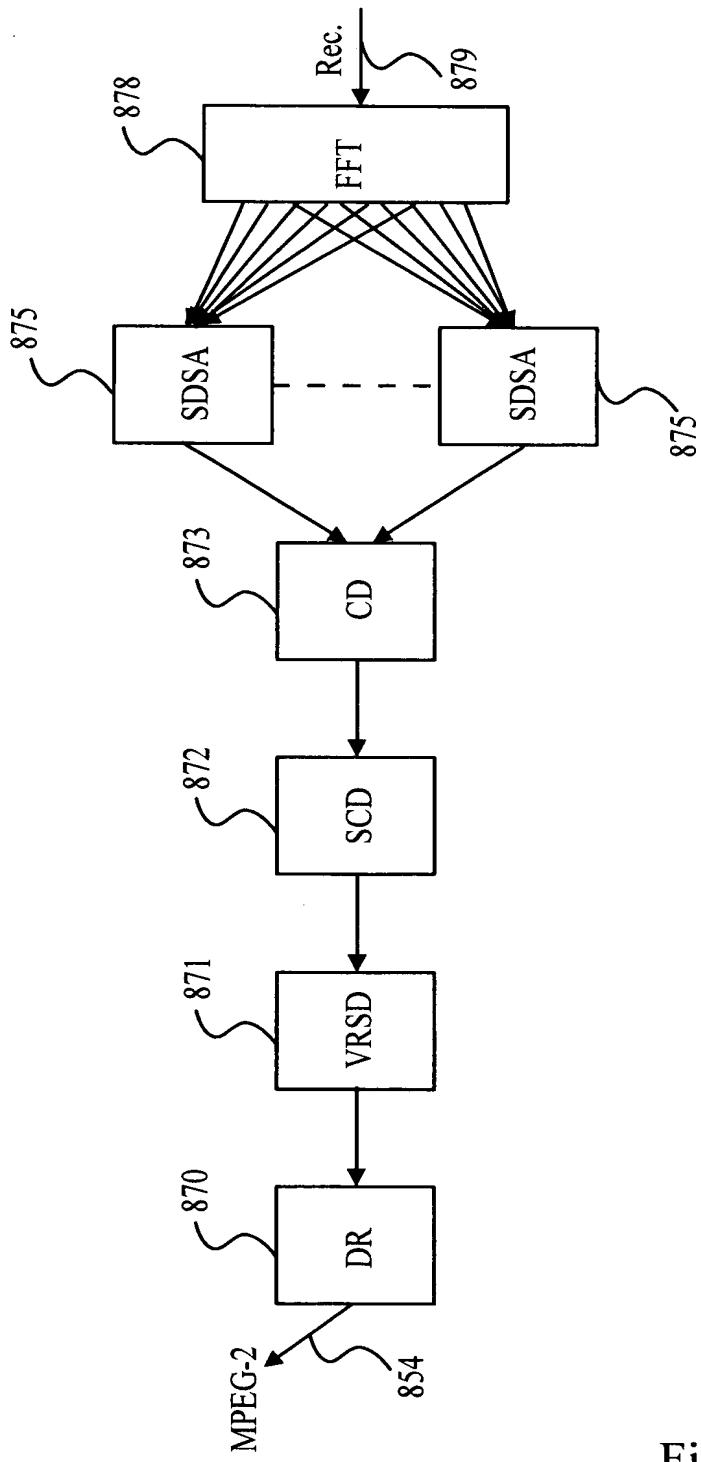


Fig. 14

15/20

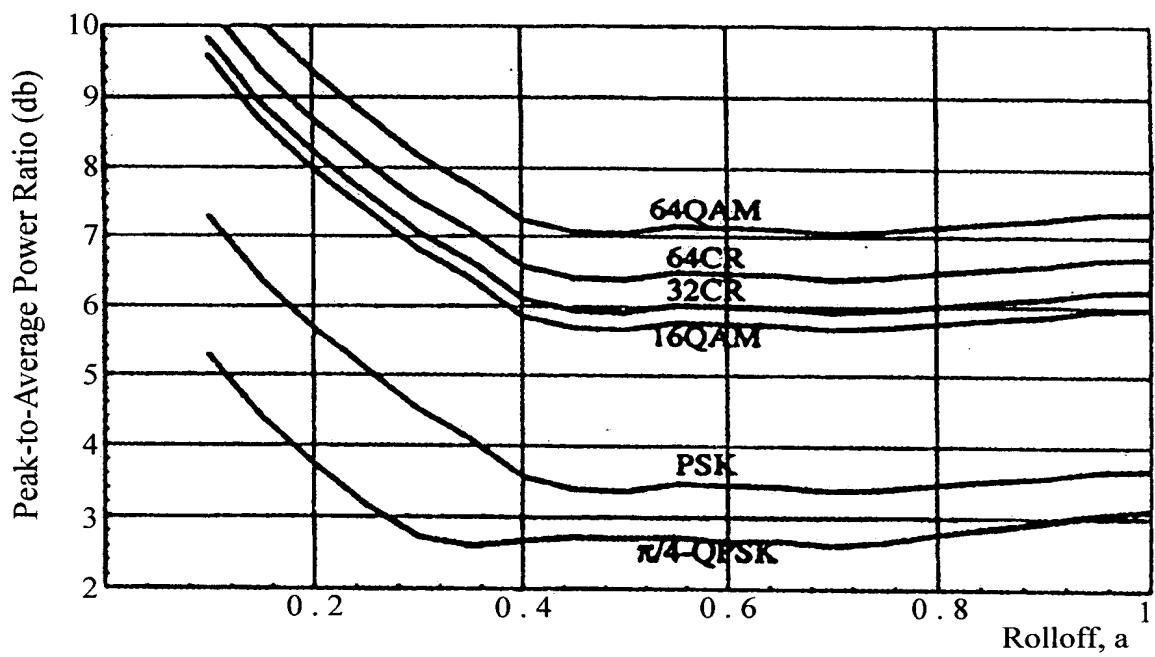


Fig. 15

16/20

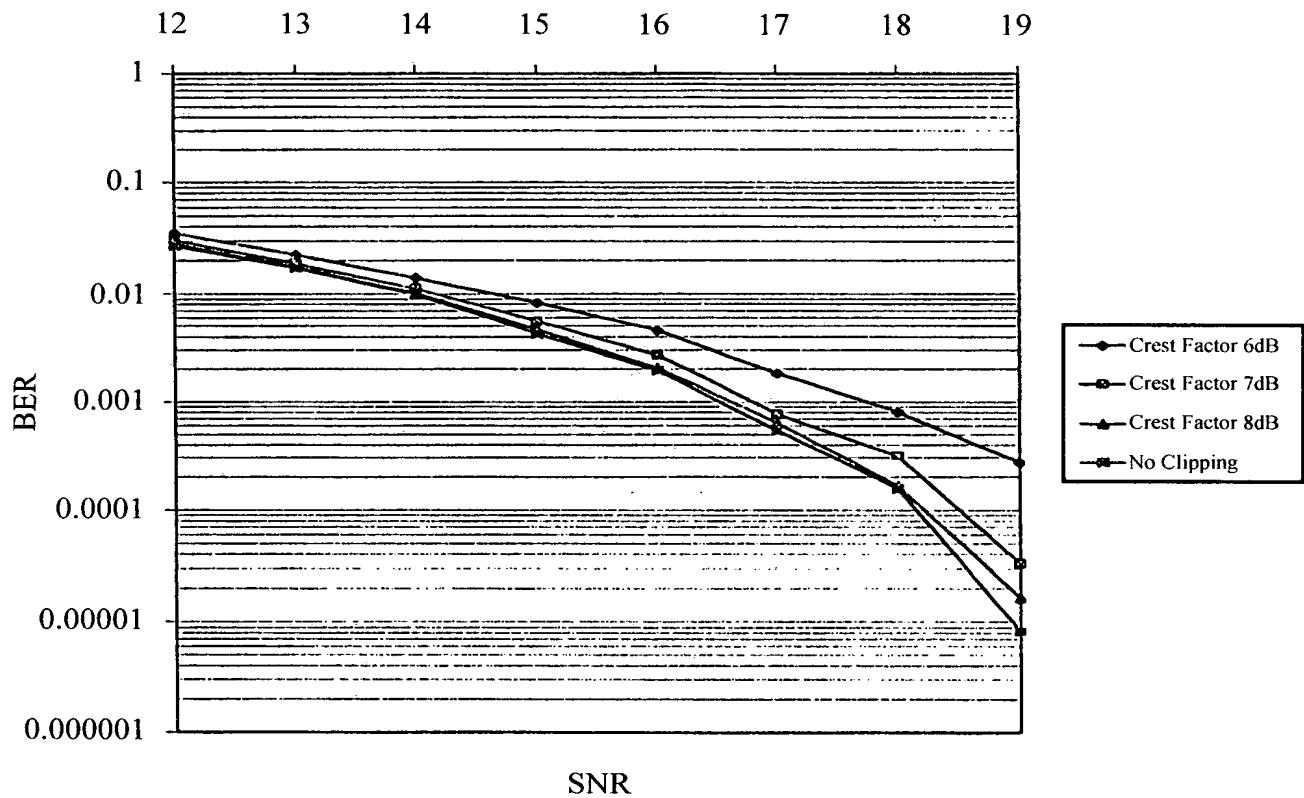


Fig. 16

17/20

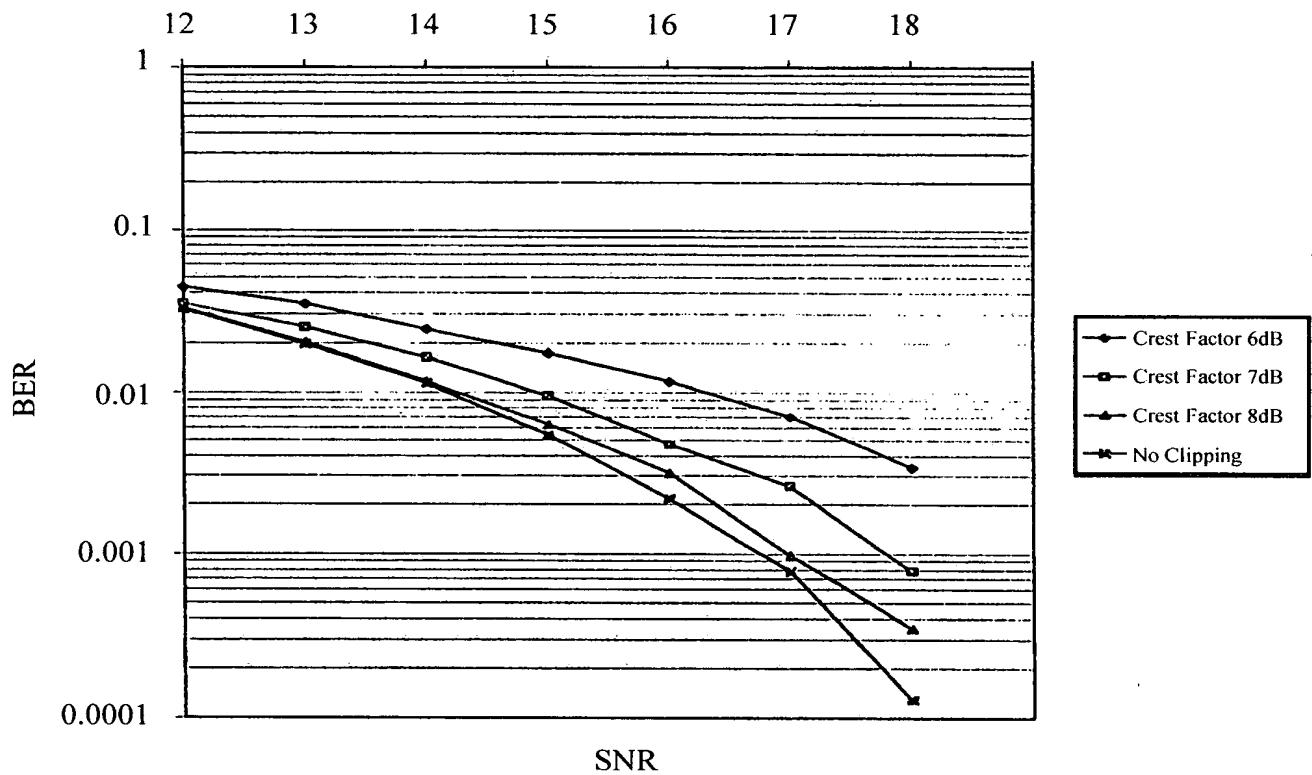


Fig. 17

# 18/20

Power level measured in a 4 kHz bandwidth.

Where 0 dB corresponds to the total output power


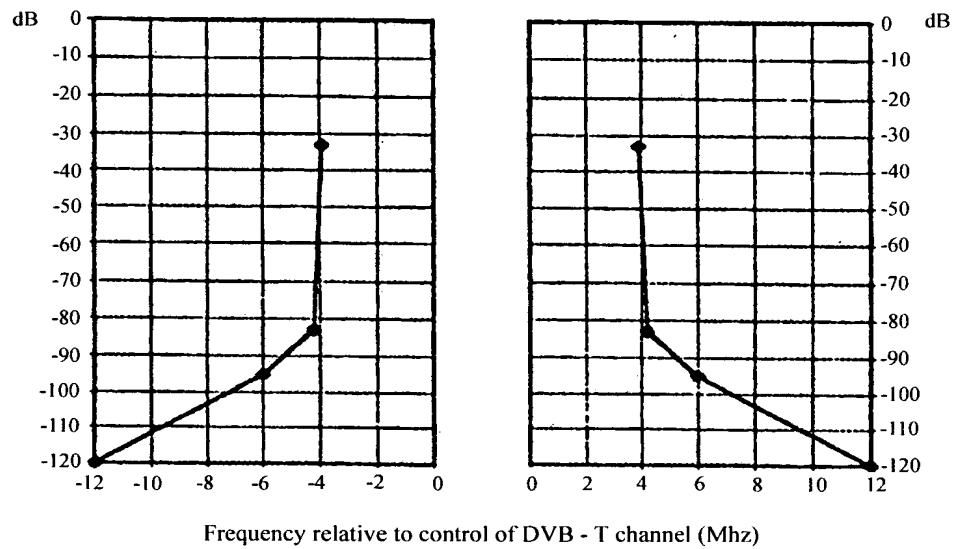


Fig. 18

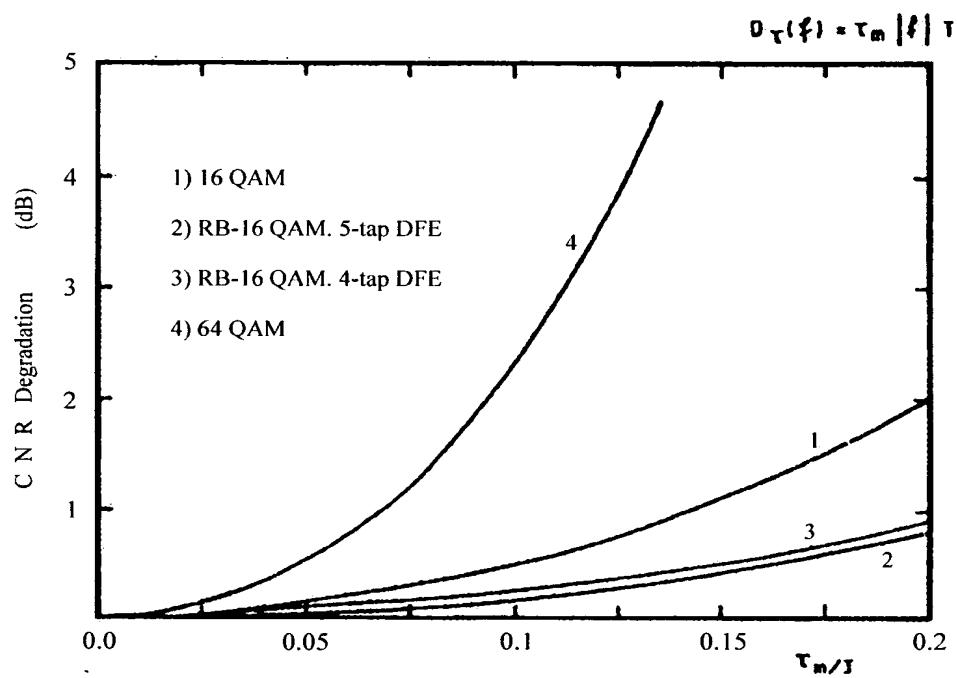

Influence of linear group-delay distortion on the performance of the three modulation schemes.

Fig. 19

20/20

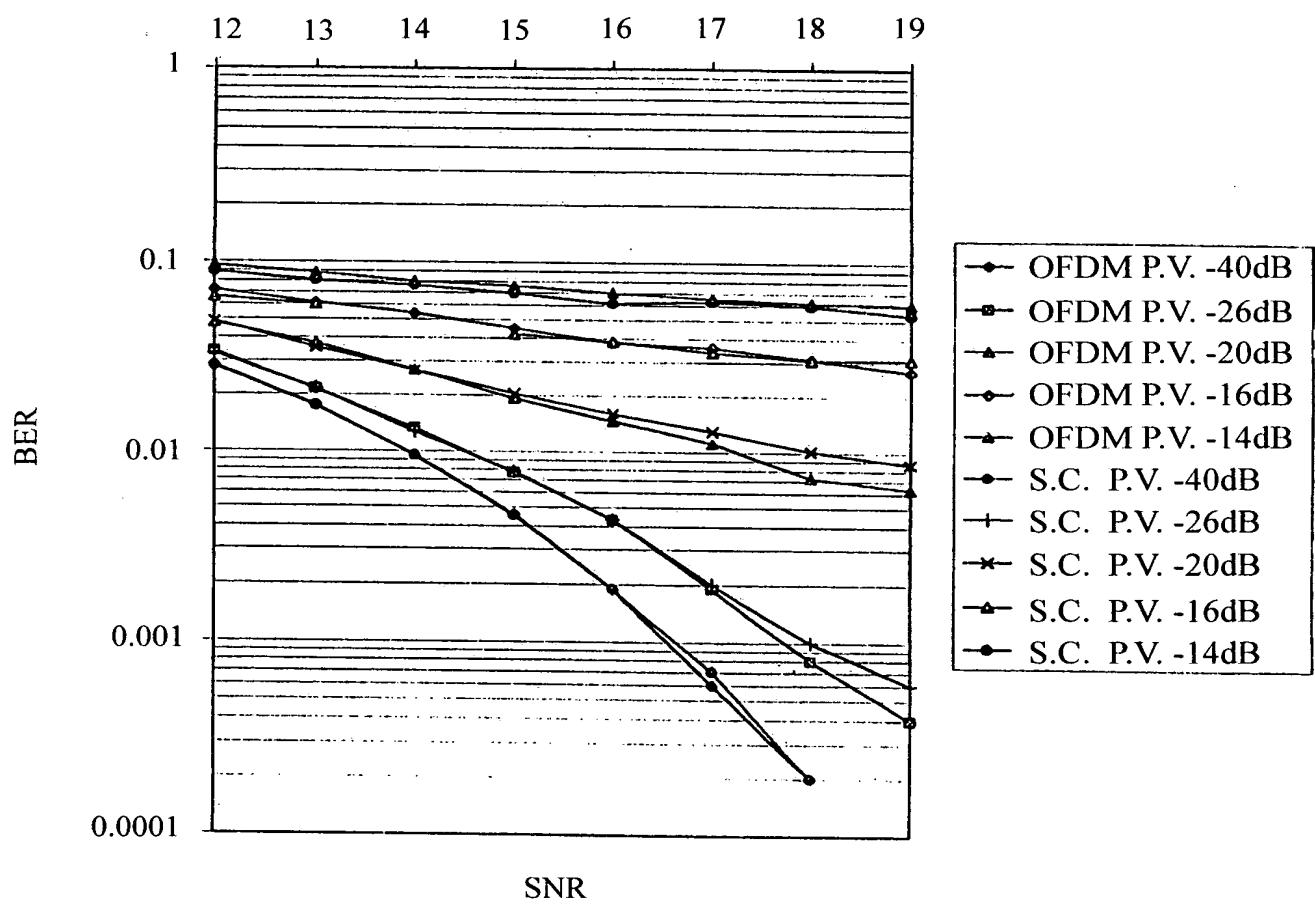


Fig. 20